
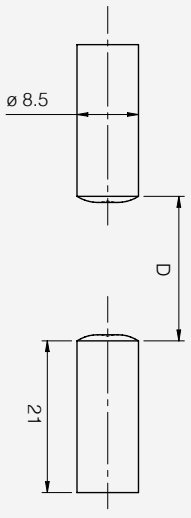

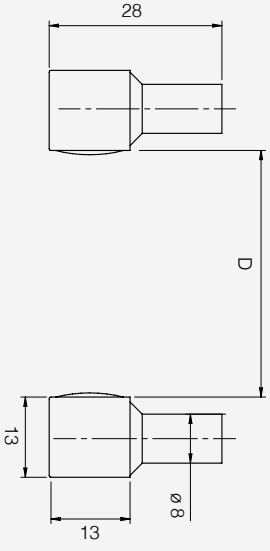


additional lens (through-beam) AF/ER2 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>∅ optical fibre core</td> <td>CV/RB6-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>8,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>10,000 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+125°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	∅ optical fibre core	CV/RB6-**	distance (with SSF)	3,000 mm	distance (with FS1)	3,000 mm	distance (with FX3)	8,000 mm	distance (with FX4)	10,000 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+125°C	materials	glass, nickel-plated brass	
	∅ optical fibre core	CV/RB6-**																		
distance (with SSF)	3,000 mm																			
distance (with FS1)	3,000 mm																			
distance (with FX3)	8,000 mm																			
distance (with FX4)	10,000 mm																			
thread	M4																			
protection degree	IP67 (EN60529)																			
temperature range	-40°C....+125°C																			
materials	glass, nickel-plated brass																			

additional lens (through-beam) AF/ER3 model

product	main features	dimensions (mm)																		
	<table border="1"> <tr> <td>∅ optical fibre core</td> <td>CV/RB6-**</td> </tr> <tr> <td>distance (with SSF)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>8,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>10,000 mm</td> </tr> <tr> <td>thread</td> <td>M4</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+70°C</td> </tr> <tr> <td>materials</td> <td>glass, nickel-plated brass</td> </tr> </table>	∅ optical fibre core	CV/RB6-**	distance (with SSF)	3,000 mm	distance (with FS1)	3,000 mm	distance (with FX3)	8,000 mm	distance (with FX4)	10,000 mm	thread	M4	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, nickel-plated brass	
	∅ optical fibre core	CV/RB6-**																		
distance (with SSF)	3,000 mm																			
distance (with FS1)	3,000 mm																			
distance (with FX3)	8,000 mm																			
distance (with FX4)	10,000 mm																			
thread	M4																			
protection degree	IP67 (EN60529)																			
temperature range	-40°C....+70°C																			
materials	glass, nickel-plated brass																			

