

STD-Heron™

Installation and Utilization Instructions

GENERAL FEATURES

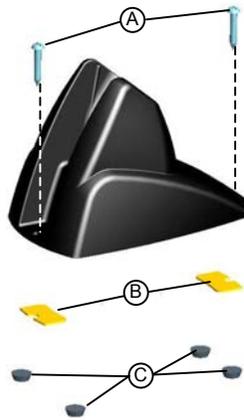


Figure 1

The STD-Heron™ is supplied with a mounting kit containing the following components:

- ◆ 2 self-tapping screws
- ◆ 4 rubber feet
- ◆ 2 adhesive strips

STD-Heron™

Installation and Utilization Instructions

GENERAL FEATURES

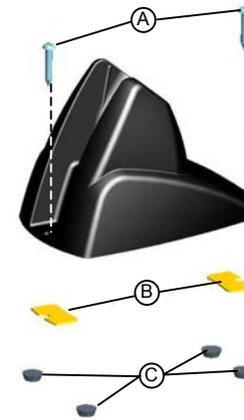


Figure 1

The STD-Heron™ is supplied with a mounting kit containing the following components:

- ◆ 2 self-tapping screws
- ◆ 4 rubber feet
- ◆ 2 adhesive strips

INSTALLATION

The STD-Heron™ can be fixed to a surface by using the self-tapping screws or the double-sided adhesive strips.

Mounting with screws:

- mount the stand directly to the surface using the self-tapping screws.

Mounting with adhesive strips:


- carefully clean the bottom surface of the stand and the table surface with alcohol to remove any impurities that could reduce the adhesion. Remove the protective plastic from one side of the adhesive strips and stick them on the stand bottom. Then, remove the plastic from the other side of the strips and affix the stand to the table.

For a non-fixed desktop use:

- carefully clean the bottom surface of the stand.
- remove the protective film from the rubber feet adhesive side and stick them in the corresponding housing on the bottom surface.

It is also possible to fix an optional metal plate inside the stand to make it more suitable for portable desktop use.

INSERTION INTO STAND

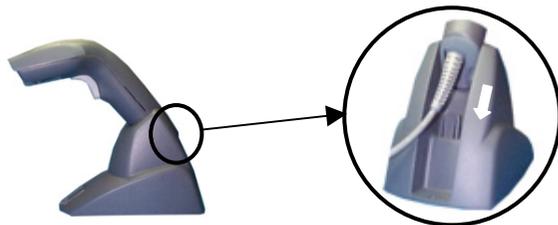

Pair the reader to the stand paying attention to insert the handle into the stand clip (see figure above). Correct insertion will be signaled by a beep; then, the reader will be ready to read barcodes.

INSTALLATION

The STD-Heron™ can be fixed to a surface by using the self-tapping screws or the double-sided adhesive strips.

Mounting with screws:

- mount the stand directly to the surface using the self-tapping screws.

Mounting with adhesive strips:


- carefully clean the bottom surface of the stand and the table surface with alcohol to remove any impurities that could reduce the adhesion. Remove the protective plastic from one side of the adhesive strips and stick them on the stand bottom. Then, remove the plastic from the other side of the strips and affix the stand to the table.

For a non-fixed desktop use:

- carefully clean the bottom surface of the stand.
- remove the protective film from the rubber feet adhesive side and stick them in the corresponding housing on the bottom surface.

It is also possible to fix an optional metal plate inside the stand to make it more suitable for portable desktop use.

INSERTION INTO STAND

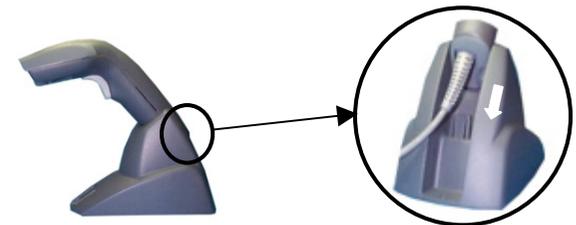

Pair the reader to the stand paying attention to insert the handle into the stand clip (see figure above). Correct insertion will be signaled by a beep; then, the reader will be ready to read barcodes.